

RYUSEI



Contact us : Tel + 66(0)-2908-1896

Sales: Ms. Kochnit

Mobile: + 66(0)-81-780-3559

E-Mail : m_kochnit@ryusei-th.com

Ms. Nattharin

Mobile: + 66(0)-81-780-1275

E-Mail: s_nattharin@ryusei-th.com



Company Profile



- **Company Name**
 - : RYUSEI CO.,LTD
- **Address**
 - : 75/9 Moo11 T.Klongnueng A.Klongnuang,
Prathumthani 12120 Thailand
- **TEL**
 - : + 66(0)-908-1179
- **FAX**
 - : + 66(0)-908-1179
- **Registered Capital**
 - : 4,000,000 Baht
- **Registered Date**
 - : 16 March 2012
- **Authorized Director**
 - : Mr. Mikio Nemoto (Managing Director)
 - : Mr. Sahayod (Director)
 - : Ms. Nattharin (Director)
- **Land (Factory) area**
 - : 950m² (500 m²)
- **Employees**
 - : 18 Persons (Japanese 2 person)


Press Product

Mica & Gasket

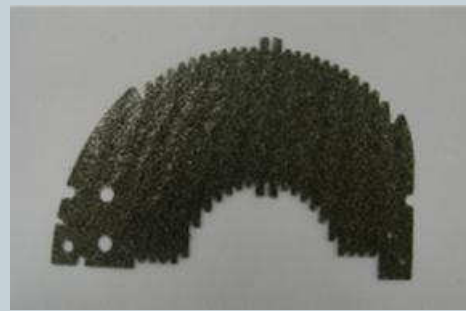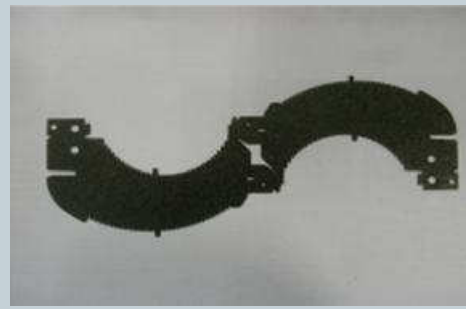

Press Product

Film & Double side tape & Adhesive

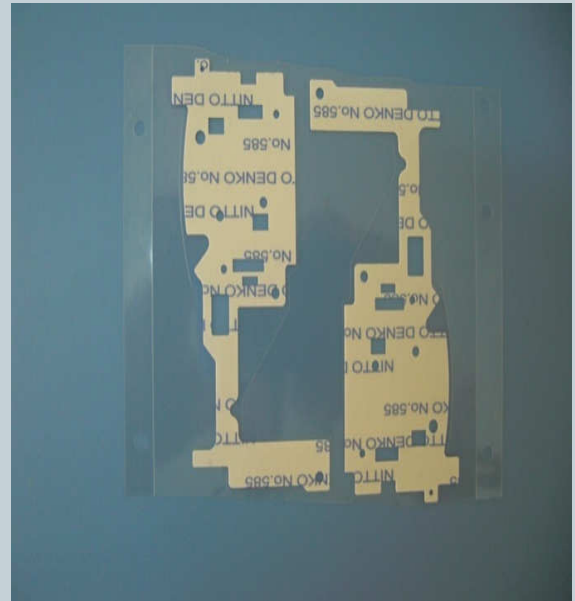

Solder Pallet for PCBA





Router Fixture Jig & Template for PCBA



Materials

Ricocel & MC Nylon & ESD PVC

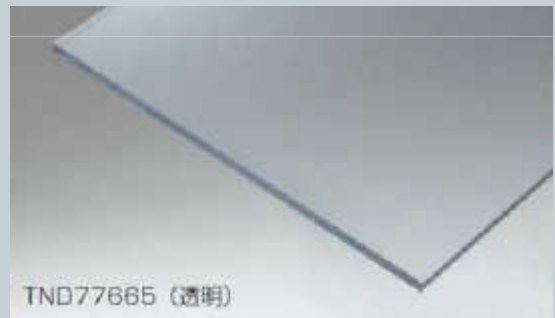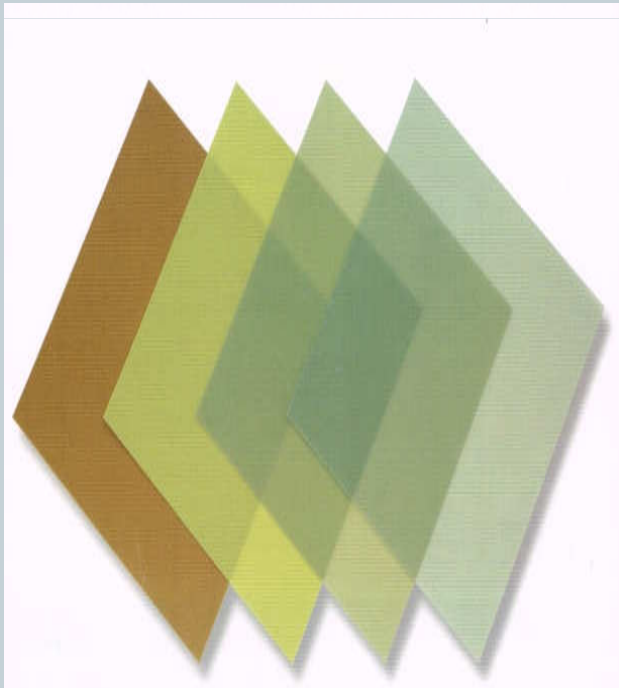

TND77665 (透明)



▲リコセル RICOCEL 利工塑

JX Nippon Energy & Oil Corp is...



**JX Holding,
Inc.**

JX Nippon Oil
& Gas
Exploration
Corp

JX Nippon
Mining Metals
Corp

Nippon Oil &
Energy Corp

**Nonwovens
Sales Group**

What is CLAF®




1- Non-woven

- The Intersection is bonded by heat

2- Polyolefin

- Made of PE or PP

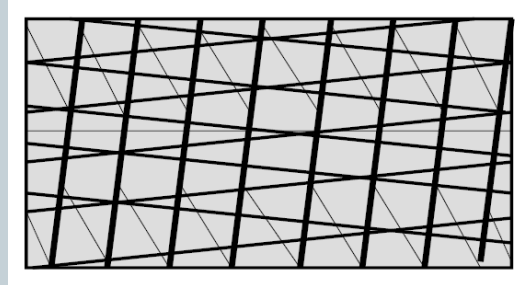

3- Reinforcement

- Known as the reinforcement of many materials

Ex: Paper, Film, Aluminum foil,
Foam and so on

CLAF® use for?




Construction material & Tape
Industrial Packaging Materials
Agricultural materials
Desiccant packaging material
Draining bag & Produce bag



Cooler Box



Cold Box (85L) Performance verification

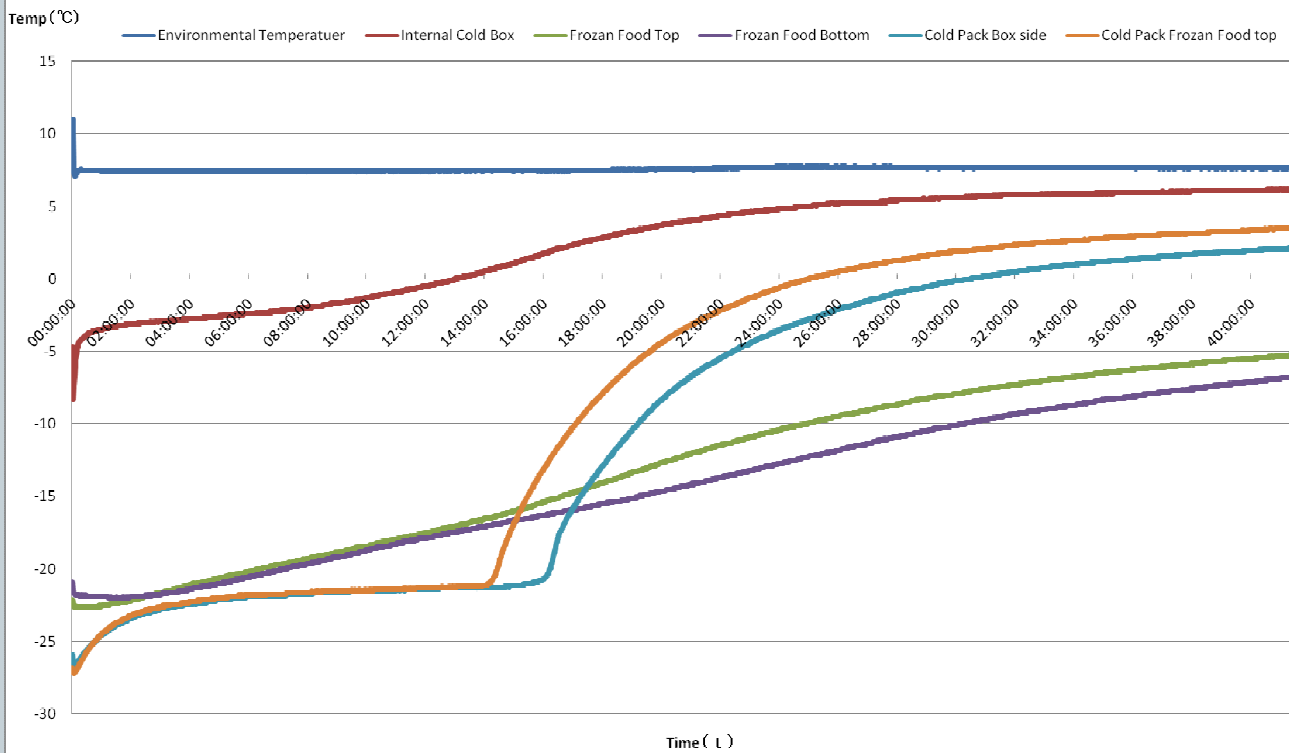

Barrier P-II



Hydrogen water generator



ESD Products

(Mats & Film)

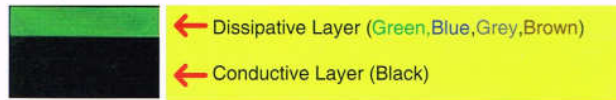


TABLE MAT (SHINY / GREEN)


SIZE :	2mm(T)x60cm(W)x10m(L)
SIZE :	2mm(T)x90cm(W)x10m(L)
SIZE :	2mm(T)x100cm(W)x10m(L)
SIZE :	2mm(T)x120cm(W)x10m(L)



Composition/ Construction



ANTISTATIC PVC GRID & CLEAR CURTAIN FILM

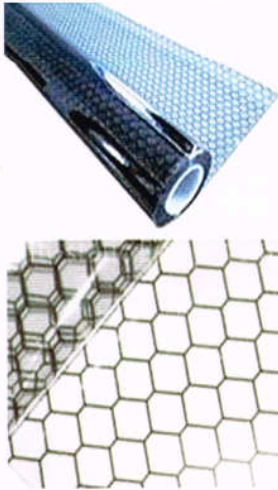

			Test Method
Surface Resistivity	Surface	Back	ASTM D 257
		$10^{5-7} \Omega/SQ$	
Electrostatic Voltage	Less 50V	Less 100V	Electrostatic Field Meter
Electrostatic Decay	Less than 0.5 sec	Less than 0.5 sec	ML-9-6170SC,5000V → 500V
Flame Retardant	PASS	PASS	JIS A-1322
Tenile Strength	MD (↔)	1.9 kg/mm ²	ASTM D-882
	TD (↓)	1.9 kg/mm ²	
100% Modulus	MD (↔)	1.1 kg/mm ²	ASTM D-882
	TD (↓)	1.8 kg/mm ²	
Elongation	MD (↔)	170%	ASTM D-882
	TD (↓)	210%	
Heat Shrinkage 70 °Cx30min in H2O	Less than 1%		Our Lab Testing
	Less than 5%		
Size	Thickness	0.3mm / 0.5 mm	
	Width	1,370 mm	
	Length	30 m/roll	
Application	Partition for cleanroom and curtains, Portable window, mill fire, Countermeasure for building's fire, Covering materials for IC panel and others for anti-static application		